

STATIC CLING VINYL

Applying your static cling vinyl from INDUSTRYimages is easy. No glue or adhesive is involved, and static cling vinyl is easily removed, repositioned and reusable. It adheres face-in or face-out to any clean, smooth, glassy surface with no unsightly residue or damage left behind.

INSTALLATION

Prior to applying, ensure the surface is clean and free of debris.

Using a spray bottle on the 'mist' setting, wet the surface to which you wish to apply your static cling. See *figure 1*

Place your static cling face-up on a flat surface and gently peel the vinyl away from the backing. See *figure 2*

Place your static cling vinyl on the surface (face-in or face-out). If wet enough, you should be able to slide the vinyl to adjust the placement until in a position that you're happy with.

Using a soft rubber squeegee, or the edge of your hand, force as much water (and air bubbles) out from behind the vinyl as you can, working your way from the centre out. See *figure 3*

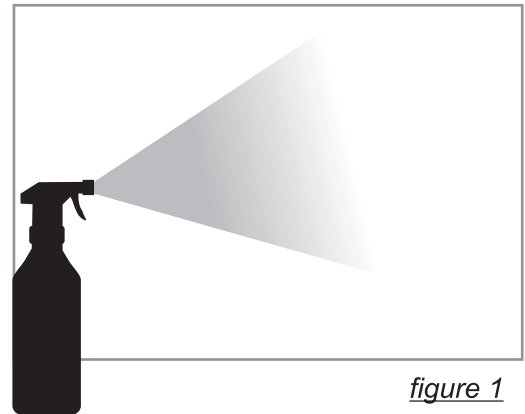


figure 1

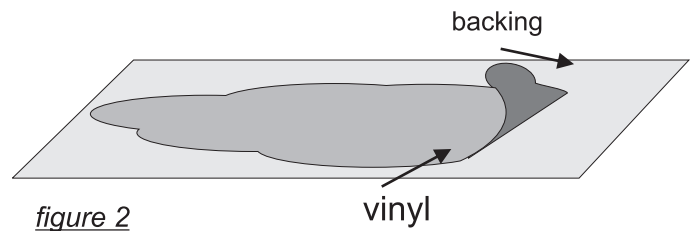


figure 2

> Any water trapped under the vinyl will dry over time - typically within one day.

> If you are planning to use your static cling over and over again, it's recommended that you store it on the backing paper when not in use.

> If the static cling vinyl is applied face-out (ink to glass) to an outside window, the constant heating and cooling can cause ink to transfer from the vinyl to your window. Should this happen, the ink can easily be removed from your window with any solvent-based cleaner.

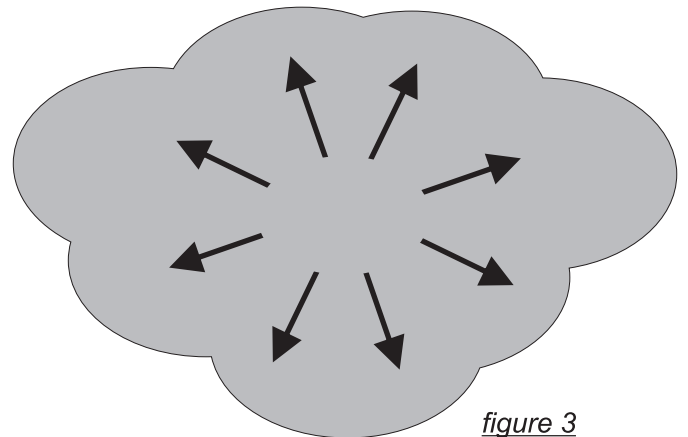


figure 3